


## شرکت بُردار مبنا، وارد کننده رسمی سایت مستر های ارجینال از ANRITSU , BIRD , JDSU , PROTEK با خدمات پس از فروش برق

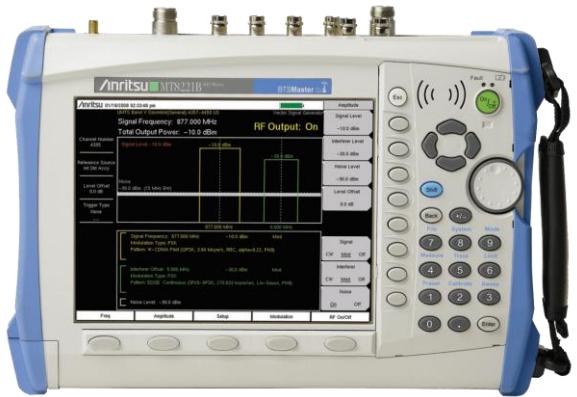

### BTS MASTER MT8221B ANRITSU

OPTIONS:10-25-27-31-33-34-42-43-62-63-541-542-546

- The BTS Master MT8221B has a frequency range of 400 MHz to 4.0 GHz Cable and Antenna Analyzer, 150 kHz to 7.1 GHz Spectrum Analyzer, and 10 MHz to 7.1 GHz Power Meter. It was designed to support 4G standards and installed 2G/3G networks. The MT8221B's platform provides a 20 MHz demodulation capability to support LTE bandwidths from 1.4 to 20 MHz. It also features a 30 MHz Zero-Span IF Output for external demodulation.
- MT8221B measurement capability includes precision return loss, VSWR, cable loss, distance-to-fault, signal identification, interference analysis, channel power, adjacent channel power ratio, field strength, transmitter power, code domain power (CDP), burst power, iDEN Constellation, two port measurement, multiple transmitted signals, power measurement, and T1/E1 measurements including DS0/VF channel monitoring. Patented RF interference rejection enables accurate, repeatable measurements in the presence of high RF activity. PC data analysis software enables assessment of system trends, problems, and performance in addition to professional report generation
- 

**متعلقات همراه استاندارد**  
 Standard Accessories  
 Include:  
**BTS MASTER MT8221B**  
**Handheld Software Tools CDROM**  
**Usb Interface Cable-Aluminum carrying case**  
**One Year Warranty**

تماس بگیرید

کد سفارش : ۱۱۴۰-۹۰



**متعلقات همراه استاندارد**

Cell master 8212B User's Guide  
 Anritsu Handheld Software Tools CDROM  
 Soft Carrying Case  
 Rechargeable SMART Battery, NiMH  
 AC-DC Adapter with Power Cord  
 Automotive Cigarette Lighter/12 Volt DC Adapter  
 Serial Interface Cable  
 One Year Warranty +  
 گواهینامه کالیبراسیون

## Cell Master8212B Handheld Cable, Antenna and Base Station Analyzer

**OPTIONS:21-25-27-28-31-33-34-42-43-62-63**

Cell Master MT8212B is the value choice for deploying, maintaining and troubleshooting wireless base



stations. Compact, handheld and lightweight.

For network installation and maintenance, Cell Master MT8212B eliminates the need for field engineers and field technicians to carry, manage and learn multiple test sets. It includes transmitter analyzer (GSM, CDMA, cdmaOne, CDMA2000 1xRTT, and CDMA2000 1xEV-DO, and iDEN), transmission analyzer for 2-port devices, interference analyzer, channel scanner, GPS receiver, GPS Antenna Tester, CW signal generator (tests LNAs, repeaters or base station receiver sensitivity), and T1/E1 analyzer.

MT8212B measurement capability includes precision return loss, VSWR, cable loss, distance-to-fault, signal identification, interference analysis, channel power, adjacent channel power ratio, field strength, transmitter power, code domain power (CDP), burst power, iDEN Constellation, two port measurement, multiple transmitted signals, power measurement, and T1/E1 measurements including DS0/VF channel monitoring. Patented RF interference rejection enables accurate, repeatable measurements in the presence of high RF activity. PC data analysis software enables assessment of system trends, problems, and performance in addition to professional report generation

تماس بگیرید

کد سفارش : ۱۳۸۲-۹۰



شرکت بُردار مبنا، مرگز تخصصی فروش، خدمات پس از فروش، اجاره و کالیراسیون سایت مسترهاي مخابراتی از کمپانیهای معتبر دنیا ANRITSU , BIRD , JDSU , PROTEK



## • Anritsu MS2711D Spectrum Master Handheld



- Frequency range: 100 kHz-3 GHz
- Handheld, battery-operated design
- Built in pre-amplifier (standard)
- Noise Level: < -135 dBm typical (preamp on)
- Quick Zoom-in, Zoom-out display in 1-2-5 sequence
- RBWs: 100 Hz to 1 MHz in 1-3 sequence; VBWs: 3 Hz to 1 MHz in 1-3 sequence
- Automatic, manual, and dynamic attenuator control; Amplitude Accuracy +/- 0.5 dB typical
- Dedicated smart measurements, Trace Averaging, Reference Level Offset, Trace Overlay
- Multilingual User Interface (English, Chinese, French, German, Japanese, Spanish)
- Store up to 15 measurement test set-ups and save up to 200 measurement traces
- Alphanumeric labeling of saved measurements and Automatic time and date stamp of saved data
- Rechargeable/field-replaceable battery
- 6 Markers, limit lines and segmented limit lines
- 50-ohm Interface standard (75-ohm interface capability - instrument internally corrects for adapter loss)
- RS232 Interface
- Built in AM, FM and SSB demodulation

Covering the 100 kHz to 3.0 GHz frequency range, with a built in standard pre-amplifier, the Anritsu MS2711D handheld spectrum analyzer is the proven solution for installing, provisioning, maintaining and troubleshooting wireless systems and RF frequency spectrum interference issues. This portable spectrum analyzer features a built-in standard preamplifier in a compact, handheld design that can go "anywhere, anytime" with no backpack required. Ideal for field environments and applications that require mobility, such as site surveys and on-site system testing

متعلقات همراه استاندارد:  
**Spectrum MS2721B User's Guide**  
**Anritsu Handheld Software Tools CDROM**  
**Soft Carrying Case**  
**Rechargeable SMART Battery, NiMH**  
**AC-DC Adapter with Power Cord**  
**Automotive Cigarette Lighter/12 Volt DC Adapter**  
**Serial Interface Cable**  
**گواهینامه کالیراسیون** +  
**One Year Warranty**



تماس بگیرید	۹۷۹-۹۰	کد سفارش :	
	Standard Accessories Include:  Spectrum Aronia hf6065 User's Guide Anritsu Handheld Software Tools CDROM Soft Carrying Case Rechargeable SMART Battery, NiMH AC-DC Adapter with Power Cord /12 Volt DC Adapter Usb Interface Cable-Aluminum carrying case One Year Warranty	<b>Aronia SPECTRAN HF-6065 V4</b>  RF frequency range: 10MHz to 6GHz DANL: -135dBm(1Hz) Max. power at RF input: +10dBm Lowest sample time: 10mS Resolution (RBW): 3kHz to 50MHz Units: dBm, dBµV, V/m, A/m, W/m <sup>2</sup> (dBµV/m, W/cm <sup>2</sup> etc. via PC software) Detectors: RMS, Min/Max Demodulator: AM, FM Input: 50 Ohm SMA RF-input (f) Accuracy: +/- 2dB (typ.) Interface: USB 2.0/1.1 Low noise pre-amplifier included Dimensions (L/W/D): 250x86x27 mm	
تماس بگیرید	۱۱۴۰-۹۰	کد سفارش :	۴



**متعلقات همراه استاندارد**  
**Aaronia Antenna 4040x**  
**Handheld Software Tools CDROM**  
**Tripod/SMA Connector**  
**Usb Interface Cable-Aluminum carrying case**  
**One Year Warranty**

تماس بگیرید

کد سفارش: ۱۱۴۰-۹۰

## Antenna Aaronia HyperLOG 4040 X

### آنتن Directional قابل استفاده برای تمام مدل های اسپکتروم آنالایزر

- **Compatible with any Spectrum Analyzer brand**
- **Design:** ACTIVE directional Logarithmic-periodic
- **Frequency range:** 400MHz to 4GHz
- **Nominal impedance:** 50 Ohm
- **VSWR:** <1:2 (typ.)
- **Gain:** 44dBi (typ.)
- **Antenna factor:** See data sheet graph
- **RF connection:** SMA (f) or N (see optional adapter)
- **Tripod connection:** 1/4"
- **Interface:** USB 2.0/1.1
- **Calibration points:** 361 (10MHz-steps)
- **Dimensions (L/W/D):** 590x360x30 mm
- **Weight:** 1400gr

#### Highlights:

- Ultra high gain for detecting even lowest RF sources
- Integrated Low Noise Preamplifier incl. LiPo battery
- Runs with battery or external power supply (included)
- Integrated calibration data on EEPROM (readout via USB)
- Additional standard calibration data (on CD)
- Special designed radome for perfect antenna protection
- Gold coating for stable performance
- Wide bandwidth
- Coverage of various mobile radio frequency ranges
- Suitable for field-strength and EMC measurements due to high precision
- Compact and sturdy design
- Can be used in the lab and for open-field application



BORDAR MABNA CO,SA  
Surveying, Hydrography, TELECOM & GPS Equipment's

REF:  
SITE-1400-01

با نام خدا

لیست قیمت و مشخصات فنی اسپکتروم آنالایزر  
N 35°42'35.7" E 051°24'24.9"

شرکت بُردار مبنا (سهامی خاص)

تجهیزات مخابراتی، نقشه برداری، فتوگرامتری، هیدروگرافی، GPS،  
BIRD GARMIN Anritsu Rosenberger



## Anritsu ML8720B W-CDMA AREA TESTER



The ML8720B is used for investigation and maintenance to evaluate the radio wave propagation characteristics in the area of a W-CDMA base station. When it is connected to a GPS receiver, the measured data can be correlated with positioning information (latitude and longitude).

The measurement items include functions for measuring the RSCP 1 , Ec/No and SIR 2 , which is used to evaluate the strength of the radio wave received from each base station; and the delay profile, which is used to evaluate the delay characteristics of the radio wave caused by multipath propagation.

### Features

- High-speed and high-accuracy area analysis
- Correlation with GPS positioning data
- Master/slave mode
- 3-hour battery operation
- Large-capacity memory cards

متعلقات همراه استاندارد:

Anritsu Handheld Software Tools CDROM

Soft Carrying Case

Rechargeable SMART Battery, NiMH

AC-DC Adapter with Power Cord


Automotive Cigarette Lighter/12 Volt DC Adapter

Serial Interface Cable

گواهینامه کالیبراسیون

تماس بگیرید

کد سفارش :

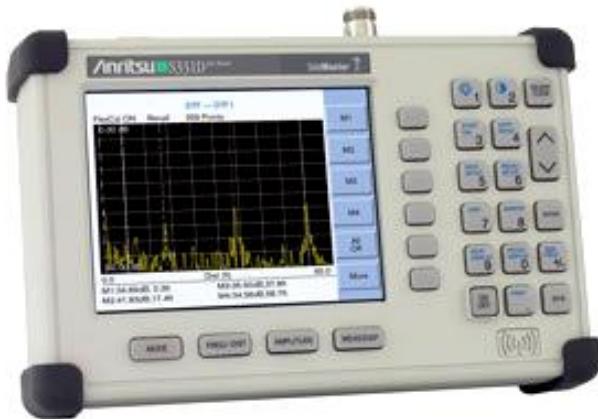

Standard Accessories Include:  
 MAIN UNIT S332D/3 + color LCD  
 S331D Site Master User's Guide  
 Anritsu Handheld Software Tools CDROM  
 Soft Carrying Case  
 Rechargeable SMART Battery, NiMH  
 AC-DC Adapter with Power Cord  
 Automotive Cigarette Lighter/12 Volt DC Adapter  
 Serial Interface Cable  
 One Year Warranty +  
 گواهینامه کالیبراسیون

تماس بگیرید

کد سفارش S332D : ۴۵۲

## ANRITSU SITE MASTER Cable and Antenna Analyzer S332D

سایت مستر 3/ با اسپکتروم آنالایز صفحه تمام رنگی محصول 2013 بسیار مقاوم!

- Frequency Range: 25 MHz to 4.0 GHz
- Frequency Accuracy:  $2 \pm 75$  ppm @  $+25^{\circ}\text{C}$
- Spectrum Analyzer, 100 kHz to 3 GHz
- Frequency Resolution: 100 kHz
- Output Power:  $<0$  dBm ( $-10$  dBm nominal)
- Immunity to Interfering Signals: On-channel: +17 dBm
- On-frequency: -5 dBm
- Measurement Speed: 2.5 m sec / data point (CW ON)
- Number of Data Points: 130, 259, 517
- **Return Loss:** Range: 0.00 to 60.00 dB
- Resolution: 0.01 dB
- **VSWR:** Range: 1.00 to 65.00
- Resolution: 0.01
- Cable Loss: Range: 0.00 to 30.00 dB
- Resolution: 0.01 dB
- Measurement Accuracy:  $>42$  dB corrected directivity after calibration
- **Distance-to-Fault:**
- Vertical Range: Return Loss: 0.00 to 60.00 dB
- VSWR 1.00 to 65.00
- Horizontal Range: 0 to (# of data pts - 1) x
- Resolution to a maximum of 1197m (3929 ft),  
 $\#$  of data pts = 130, 259 or 517
- Horizontal Resolution (Rectangular Windowing): C
- Resolution (meter) =  $(1.5 \times 108) \times (V_p)/DF$
- Where  $V_p$  is the cable's relative propagation velocity
- and where DF is the stop frequency minus the start



شرکت بُردار مبنا، مرکز تخصصی فروش، خدمات پس از فروش، اجاره و کالیبراسیون سایت مسترهاي مخابراتی از کمپانیهای معترض دنیا



BORDAR MABNA CO,SA  
Surveying, Hydrography, TELECOM & GPS Equipment's

REF:  
SITE-1400-01

با نام خدا

### لیست قیمت و مشخصات فنی اسپکتروم آنالایزر

N 35°42'35.7" E 051°24'24.9"

شرکت بُردار مبنا (سهامی خاص)

تجهیزات مخابراتی، نقشه برداری، فتوگرامتری، هیدروگرافی، GPS



Rosenberger



متعلقات همراه استاندارد

MAIN UNIT S331E & S332E (SPEC) + 7" color LCD

S331E & S332E Site Master User's Guide

Anritsu MSD SOFTWARE CDROM

Soft Carrying Case

Rechargeable SMART Battery, NiMH

AC-DC Adapter with Power Cord

Automotive Cigarette Lighter/12 Volt DC Adapter

USB Interface Cable 3 METER

گواهینامه کالیبراسیون +

تماس بگیرید

کد سفارش S331E : ۴۵۳

## ANRITSU SITE MASTER Cable and Antenna Analyzer S332E

سایت مستر S332E با اسپکتروم آنالایزر و صفحه تمام رنگی لمسی و خروجی USB محصول ۲۰۱۴

- Frequency Range: **2 MHz to 4.0 GHz**
- Spectrum Analyzer, 100 kHz to 4 GHz**
- Frequency Accuracy:  $2 \pm 75$  ppm @  $+25^\circ\text{C}$
- Frequency Resolution: 100 kHz
- Output Power:  $<0$  dBm ( $-10$  dBm nominal)
- Immunity to Interfering Signals: On-channel:  $+17$  dBm
- On-frequency:  $-5$  dBm
- Measurement Speed:  $23.5$  msec / data point (CW ON)
- Number of Data Points: 130, 259, 517
- Return Loss: Range: 0.00 to 60.00 dB
- Resolution: 0.01 dB
- VSWR: Range: 1.00 to 65.00 , Resolution: 0.0
- Cable Loss: Range: 0.00 to 30.00 dB
- Resolution: 0.01 dB
- Measurement Accuracy:  $>42$  dB corrected directivity after calibration
- Distance-to-Fault:
- Vertical Range: Return Loss: 0.00 to 60.00 dB
- VSWR 1.00 to 65.00
- Horizontal Range: 0 to (# of data pts -1) x
- Resolution to a maximum of 1197m (3929 ft),  
# of data pts = 130, 259 or 517
- Horizontal Resolution (Rectangular Windowing): C
- Resolution (meter) =  $(1.5 \times 108) \times (V_p)/DF$
- Where  $V_p$  is the cable's relative propagation velocity
- and where DF is the stop frequency minus the start



دارای پورت USB جهت اتصال به FLASH MEMORY یا ارتباط با کامپیوتر

قابلیت ذخیره اطلاعات روی کارت حافظه FLASH USB

صفحه نمایش از نوع لمسی TOUCH SCREEN با سایز 7 اینچ

دارای صفحه کلید مجازی روی صفحه نمایش و کیبورد معمولی

طراحی جدید و ظرفیف محصول ۲۰۱۴

قابلیت نمایش ۲ نمونه اندازه گیره شده در ۱ صفحه با سرعت اندازه گیری خیلی سریع



BORDAR MABNA CO,SA  
Surveying, Hydrography, TELECOM & GPS Equipment's

REF:  
SITE-1400-01

با نام خدا

لیست قیمت و مشخصات فنی اسپکتروم آنالایزر

N 35°42'35.7" E 051°24'24.9"

شرکت بُردار مبنا (سهامی خاص)

تجهیزات مخابراتی، نقشه برداری، فتوگرامتری، هیدروگرافی، GPS

BIRD GARMIN Anritsu Rosenberger



## ANRITSU SITE MASTER Cable and Antenna Analyzer S332C

+ با اسپکتروم آنالایز

### دست دوم در حد نو، سالم با گارانتی بُردار مبنا

- Frequency Range: 25 MHz to 4.0 GHz
- Frequency Accuracy:  $\pm 75$  ppm @ +25°C
- Spectrum Analyzer, 100 kHz to 3 GHz
- Frequency Resolution: 100 kHz
- Output Power: <0 dBm (-10 dBm nominal)
- Immunity to Interfering Signals: On-channel: +17 dBm
- On-frequency: -5 dBm
- Measurement Speed: 3.5 m sec / data point (CW ON)
- Number of Data Points: 130, 259, 517
- **Return Loss:** Range: 0.00 to 60.00 dB
- Resolution: 0.01 dB
- **VSWR:** Range: 1.00 to 65.00
- Resolution: 0.01
- Cable Loss: Range: 0.00 to 30.00 dB
- Resolution: 0.01 dB
- Measurement Accuracy: >42 dB corrected directivity after calibration
- **Distance-to-Fault:**
- Vertical Range: Return Loss: 0.00 to 60.00 dB
- VSWR 1.00 to 65.00
- Horizontal Range: 0 to (# of data pts -1) x
- Resolution to a maximum of 1197m (3929 ft),
- # of data pts = 130, 259 or 517
- Horizontal Resolution (Rectangular Windowing): C
- Resolution (meter) = (1.5 x 108) x (Vp)/DF
- Where Vp is the cable's relative propagation velocity

Anritsu

متعلقات همواره استاندارد:  
Standard Accessories Include:  
MAIN UNIT S332C صفحه سیاه و سفید  
S331D Site Master User's Guide  
Anritsu Handheld Software Tools CDROM  
Soft Carrying Case  
Rechargeable SMART Battery, NiMH  
AC-DC Adapter with Power Cord  
Automotive Cigarette Lighter/12 Volt DC Adapter  
Serial Interface Cable  
One Year Warranty + گواهینامه کالیبراسیون

تماس بگیرید

:S332C کد سفارش

and where DF is the stop frequency minus the start